

Feasibility of computer vision as Process Analytical Technology tool for the drying of organic apple slices

R. Moschetti¹, F. Raponi¹, M. Cecchini², D. Monarca² and R. Massantini¹

¹Department for Innovation in Biological, Agro-food and Forest system, University of Tuscia, Via S. Camillo de Lellis snc, 01100 Viterbo, Italy; ²Department of Agriculture and Forest Sciences, University of Tuscia, Via S. Camillo de Lellis snc, 01100 Viterbo, Italy.

Abstract

Quality and sustainability of product depend on the cumulative impacts of each processing step in the food chain and their interplay. Various research studies evidenced that many drying systems operate inefficiently in terms of drying time, energy demand (e.g. fossil fuels), raw material utilization and resulting product quality. Moreover, not all conventional drying processes are allowed in the organic sector. In recent years, non-invasive monitoring and control systems have shown a great potential for improvement of the quality of the resulting products. Therefore, intelligent processes enabling simultaneous multifactorial control are needed to ensure high value end products, improve energy and resource efficiency by using microcontrollers, innovative and reliable sensors and embracing various areas of research and development (e.g. computer vision, deep learning, etc.). The objective of this study was to evaluate the feasibility of computer vision (CV) as a tool in development of smart drying technologies to non-destructively forecast changes in moisture content of apple slices during drying. Samples were subjected to various anti-browning treatments at sub- and atmospheric pressures, and dried at 60°C up to a moisture content on dry basis (MC_{db}) of 0.18 g g⁻¹. CV-based prediction models of changes in moisture content on wet basis (MC_{wb}) were developed and promising results were obtained ($R^2P>0.99$, $RMSEP=0.011-0.058$ and $BIASP<0.06$ in absolute value), regardless of the anti-browning treatment. The proposed methodology lays the foundations for a scale-up smart-drying system based on CV and automation.

Keywords: in-line measurement; image analysis; vacuum impregnation; smart drying

Abbreviations: CV: Computer vision, TR: Dipping in a trehalose 4% w/v water solution, TR+AA-Dipping in a trehalose 4% w/v and ascorbic acid 1% w/v water solution, CNT: Dipping in water (control), VI: Vacuum impregnation, MC_{db} : Moisture content dry basis, MC_{wb} : Moisture content water basis, DW: Dry weight, FW: Fresh weight, Sb: Relative area shrinkage, St: Surface area the drying time 't', S0: Initial surface area, RSME: Root Mean Squared Error, R^2 : Coefficient of determination, Cal: Calibration, Pred: Prediction

INTRODUCTION

Consumers in developed countries are becoming more critical and demanding in their food choices (Grunert, 2005); they expect high-quality foods produced sustainably and preferably regionally. In addition, European policy pushes toward the sustainable development of the food sector through mid- and long-term goals. Up to the year 2050, food industry will face three important challenges: (i) to meet the global food demand generated by a growing population (ii) to increase the sustainability of the food sector and (iii) to meet consumer expectations of quality and safety.

Processing methods that enhance food stability and retain food quality have an enormous impact on globalized market through the reduction of food losses and processing, storage, transportation and distribution costs (Moschetti et al., 2017). In general, food drying plays a major role because it is successfully used to reduce storage and shipping costs by enabling storage at room temperature, reducing weight and packaging volume (Moschetti et



al., 2017). However, drying is one of the most energy-consuming processes in the food industry (Moscetti et al., 2018a); in fact, it potentially contributes to climate change as most dryers use fossil fuels (Moscetti et al., 2018a). Moreover, drying usually requires long process cycle times and may negatively affect physicochemical and sensorial characteristics of the final product (Raponi et al., 2017; Ratti, 2001). In order to alleviate drying drawbacks, several studies were carried out over the years with the aim of increasing the process efficiency through development and optimization of (i) heat recovery systems (Barbosa de Lima et al., 2015; Kemp, 2005), (ii) pre-processing methods of raw material to be dried (Lukinac et al., 2013) and (iii) real-time monitoring and control systems of process parameters affecting quality of the end-product (Sturm et al., 2014; Winiczenko et al., 2018).

Among emerging drying technologies, smart drying is one of the recent and most promising techniques (Moscetti et al., 2018a). It enables to proactively monitor quality changes in product as well as dryer operating conditions, through an interdisciplinary approach which involves various scientific sectors, such as chemometrics (Pomerantsev and Rodionova, 2012), artificial intelligence (Sun et al., 2018), biomimetics (e.g. electronic nose, tongue and mucosa) and computer vision (Sturm et al., 2014) as well as single-point spectroscopy and hyper/multi-spectral imaging (Moscetti et al., 2018a).

Apple is the fourth most consumed commercial fruit worldwide (Aghilinategh et al., 2015) and due to the modern lifestyle, dried apple exhibits a growing trend in consumption as snacks, chips or integral breakfasts (Vega-Gálvez et al., 2012). However, hot-air drying of apple may result in discoloration due to browning reactions (Sturm et al., 2012). Thus, pre-treatment of raw material is strictly recommended in order to produce a high-quality end-product (Shrestha et al., 2020). However, pre-treatment may affect drying kinetics and subsequently impact the modeling of thin-layer behavior of product, which is fundamental in deciding the ideal drying conditions (i.e. equipment design, optimization and product quality improvement).

The objective of this study was to evaluate both feasibility and robustness of computer vision as process analytical technology tool for modeling the drying kinetics of apple slices subjected to various anti-browning treatments.

MATERIAL AND METHODS

Sound apples (*Malus domestica* Borkh var. Gala) at the same ripening stage were washed, peeled, decored and cut into slices of about 5-mm thick and approx. 23-mm diameter. Samples were (i) dipped in trehalose 4% w/v (TR); trehalose 4% w/v + ascorbic acid 1% w/v (TR+AA); and water as control (CNT) at atmospheric and subatmospheric pressure (i.e. vacuum impregnation, VI); and then (ii) dried at 60°C up to a final moisture content dry basis (MC_{db}) of 0.18 g g⁻¹ DW. Ascorbic acid was selected due to its well-known inhibition effect toward polyphenol oxidase (Albanese et al., 2007; El-Shimi, 1993). Treatments were replicated two times. Trehalose is a natural disaccharide, generally recognized as safe (Megarry et al., 2011), used as a food ingredient and pharmaceutical excipient. It acts as an edible coating with ability to preserve color and aroma of the dried fruits as well as reduce non-enzymatic browning occurrence (Aktas et al., 2007; Albanese et al., 2007). Finally, subatmospheric pressure (i.e. VI) was tested because of its potential in stabilizing functional properties of food and its higher capability of embedding fruit and vegetable tissues with solutes when compared with conventional dipping (Neri et al., 2016).

The relative humidity of the drying process was not controlled but measured. Treatments were carried out at 20°C for a drying process time of 5.25 min, with a sample/solution ratio of 1:5 (w/w); specifically VI treatment consisted of a 0.25 min vacuum time and a 5 min post-vacuum time, and was achieved using a 5-L vacuum chamber connected to a vacuum pump mod. N 840.3 FT.18 (KNF, USA). Drying was performed using a hot-air dryer mod. Biosec (Tauro Essicatori, Italy) which was ad-hoc modified to embed a digital balance mod. HT1500 (NHU, Germany), a camera mod. EOS 400D (CANON, Japan) and a 4200K illuminant source. The drying setup was controlled using a single-board computer mod. Raspberry Pi B+ (Raspberry Foundation, UK) in combination with a self-made Jupyter Notebook (Project Jupyter, USA), which allowed (i) to collect data at constant time intervals (i.e. image and weight

of samples every 5 min and 4 s, respectively) and (ii) to extract morphological feature of samples from each raw image (i.e. surface area of samples). The 'relative area shrinkage' was calculated according to Equation 1:

$$S_b = \frac{S_t}{S_0} \quad (1)$$

where S_b corresponds to the 'relative area shrinkage', S_t represents the 'surface area' in pixels at the drying time ' t ', and S_0 corresponds to the 'surface area' in pixels of the fresh sample. The R software v3.4.1 was used to develop linear prediction models able to relate the changes in moisture content wet basis (MC_{wb}) of apple slices to the changes in relative area shrinkage during drying. Model performances were evaluated in terms of Root Mean Squared Error (RMSE), BIAS and coefficient of determination (R^2) of calibration (Cal.) and prediction (Pred.).

RESULTS AND DISCUSSION

Changes in quality attributes of horticultural products during drying are successfully measurable based on their variations in spatial distribution data (i.e. size and shape information), which can be analyzed through a computer vision system (Moscetti et al., 2018b). Consequently, we explored the possibilities offered by image analysis for quantifying the moisture content of apple slices as a function of change in the relative area shrinkage (S_b) of product during drying. As found in literature (Aghbashlo et al., 2015), the wet-basis moisture content (MC_{wb}) was successfully predicted using spatial information only. Thus, the additional value of the present work lays in the fact that these results underline the possibility of developing a forecast model for prediction of the drying time required by the product to reach a specific moisture content based on the past and present spatial data.

Table 1 shows linear regression model parameters and model performances in terms of prediction capability, regardless of the anti-browning pre-treatments used. Results are excellent and show a RMSEP ranging from 0.011 to 0.058 g g⁻¹ FW, a BIASP lower than 0.06 in absolute value, and a R^2P always higher than 0.99. In addition, considering that the relative humidity (R.H.) of process was not controlled, it is possible to assert that all models were insensitive to the R.H. of the drying chamber.

Table 1. Summary of parameters and performance metrics of the linear regression models.

Dipping solution	VI ^a	Slope	Intercept	RMSE ^b		BIAS ^c		R ^{2d}	
				Cal.	Pred.	Cal.	Pred.	Cal.	Pred.
CNT ^e	No	20.39	-0.06	0.009	0.019	-2.98 10 ⁻¹⁷	-0.008	0.998	0.993
TR ^f	No	19.61	-12.13	0.014	0.017	-1.15 10 ⁻¹⁷	0.007	0.997	0.996
TR+AA ^g	No	17.93	-10.89	0.008	0.022	1.59 10 ⁻¹⁷	0.004	0.999	0.997
CNT	Yes	17.37	-8.38	0.008	0.058	-1.79 10 ⁻¹⁷	-0.055	0.999	0.999
TR	Yes	17.13	-8.89	0.010	0.051	-2.64 10 ⁻¹⁷	-0.049	0.998	0.999
TR+AA	Yes	16.58	-8.40	0.005	0.011	1.33 10 ⁻¹⁷	-0.041	1.000	0.999

^aVI: vacuum impregnation (Yes and No stay for sub-atmospheric and atmospheric pressure, respectively).

^bRMSE: root mean squared error of calibration (Cal.) and prediction (Pred.).

^cBIAS: difference between the moisture content's expected value and the true value of the moisture content.

^dR²: coefficient of determination of calibration (Cal.) and prediction (Pred.).

^eCNT: control (i.e. water dipping solution).

^fTR: trehalose 4% w/v aqueous dipping solution.

^gTR+AA: trehalose 4% w/v + ascorbic acid 1% w/v aqueous dipping solution.

Specifically, it is important to highlight that models computed using spatial data from samples subjected to VI had lower predicting performances and, were less robust. This is

probably because apple is a highly porous product and VI alters both porosity and texture in a non-systematic way. However, further research would be necessary for verification.

Figure 1 shows results from the regression model for the TR+AA dipping treatment (no VI), which was selected as example treatment. For all models, a BIAS issue was evident during the second falling rate drying period, i.e. when MC_{wb} dropped below 0.1 g g^{-1} FW.

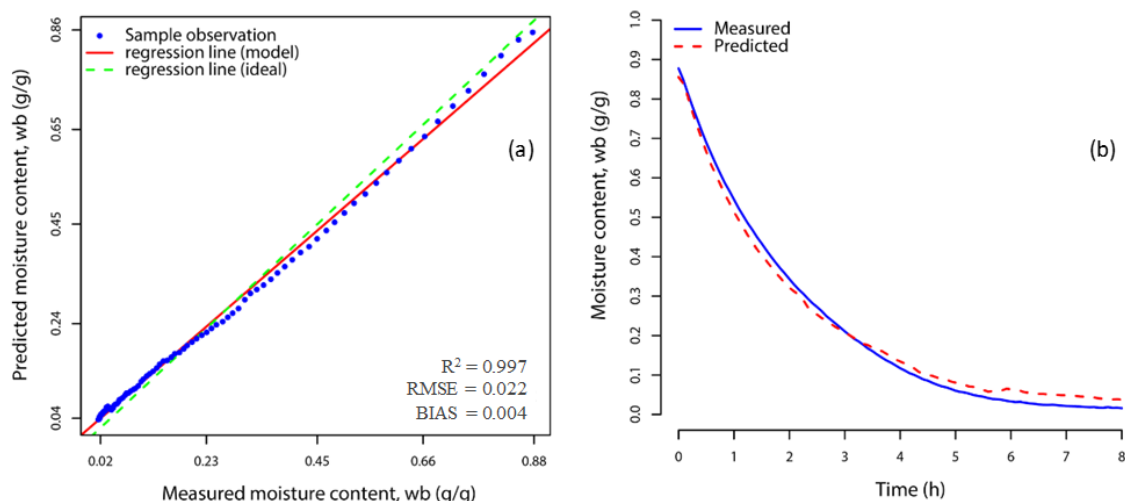


Figure 1. Example of linear regression plot (a) and first-order plot (b) which compares the measured MC_{wb} versus the predicted MC_{wb} as output of the TR+AA (no VI) model.

CONCLUSIONS

In this study the feasibility of using computer vision technology as smart-drying technology, to proactively and non-destructively detect and monitor physicochemical changes (i.e. moisture content) in organic apple slices (*Malus domestica* Borkh var. Gala) during hot-air drying at 60°C was investigated. The work represents a preliminary study for the development of large-scale CV-based smart drying systems.

On the basis of the results obtained, it is possible to assert that an in-line CV system embedded into a hot-air-drying unit allows to precisely measure the area of shrinkage of apple slices, and then to predict changes in MC_{wb} of product through the linear relationship between the two parameters. No impact of the anti-browning treatment on the performance of the prediction models was noted. The practical implication of this study is that modeling the data acquired during drying through computer vision can provide useful information concerning the physicochemical changes of product. Thus, the proposed approach lays the foundations for a more efficient smart dryer that can be designed, and its process optimized for drying of apple slices, reducing the human error, production cycle time, analytical time and costs.

ACKNOWLEDGEMENTS

The authors gratefully acknowledge 1) CORE Organic Plus consortium (ERA-NET action) and MIPAAF (Ministero delle politiche agricole alimentari e forestali - Italy) for financial support through the SusOrgPlus project (D.M. 20/12/2017, n. 92350) and 2) the 'Departments of excellence 2018' program (i.e. 'Dipartimenti di eccellenza') of the Italian Ministry of Education, University and Research (MIUR) for the financial support through the 'Landscape 4.0 food, wellbeing and environment' (DIBAF department of University of Tuscia) Moreover, our sincere thanks to Gianpaolo Moscetti and Swathi Sirisha Nallan Chakravatula for the English language revision of the manuscript.

Literature cited

Aghbashlo, M., Hosseinpour, S., and Mujumdar, A.S. (2015). Application of artificial neural networks (ANNs) in drying technology: a comprehensive review. *Dry. Technol.* 33 (12), 1397-1462 <https://doi.org/10.1080/>

Aghilinategh, N., Rafiee, S., Gholikhani, A., Hosseinpour, S., Omid, M., Mohtasebi, S.S., and Maleki, N. (2015). A comparative study of dried apple using hot air, intermittent and continuous microwave: evaluation of kinetic parameters and physicochemical quality attributes. *Food Sci Nutr* 3 (6), 519–526 <https://doi.org/10.1002/fsn3.241>. PubMed

Aktas, T., Fujii, S., Kawano, Y., and Yamamoto, S. (2007). Effects of pretreatments of sliced vegetables with trehalose on drying characteristics and quality of dried products. *Food Bioprod. Process.* 85 (3), 178–183 <https://doi.org/10.1205/fbp07037>.

Albanese, D., Cinquanta, L., and Di Matteo, M. (2007). Effects of an innovative dipping treatment on the cold storage of minimally processed Annurca apples. *Food Chem.* 105 (3), 1054–1060 <https://doi.org/10.1016/j.foodchem.2007.05.009>.

Barbosa de Lima, A.G., Da Silva, J.V., Pereira, E.M.A., Dos Santos, I.B., and Barbosa de Lima, W.M.P. (2015). Drying of bioproducts: Quality and energy aspects. In *Drying and Energy Technologies* (Springer).

el-Shimi, N.M. (1993). Control of enzymatic browning in apple slices by using ascorbic acid under different conditions. *Plant Foods Hum Nutr* 43 (1), 71–76 <https://doi.org/10.1007/BF01088098>. PubMed

Grunert, K.G. (2005). Food quality and safety: consumer perception and demand. *Eur. Rev. Agric. Econ.* 32 (3), 369–391 <https://doi.org/10.1093/euragg/jbi011>.

Kemp, I.C. (2005). Reducing dryer energy use by process integration and pinch analysis. *Dry. Technol.* 23 (9-11), 2089–2104 <https://doi.org/10.1080/07373930500210572>.

Lukinac, J., Velić, D., Magdić, D., Mujić, I., Bilić, M., and Jokić, S. (2013). Antibrowning Effects of Various Pretreatment Methods on Dried Apple Samples. *Acta Hort.* 989, 261–270 <https://doi.org/10.17660/ActaHortic.2013.989.34>.

Megarry, A.J., Booth, J., and Burley, J. (2011). Amorphous trehalose dihydrate by cryogenic milling. *Carbohydr Res* 346 (8), 1061–1064 <https://doi.org/10.1016/j.carres.2011.03.011>. PubMed

Moscetti, R., Haff, R.P., Ferri, S., Raponi, F., Monarca, D., Liang, P., and Massantini, R. (2017). Real-time monitoring of organic carrot (var. Romance) During Hot-Air Drying Using Near-Infrared Spectroscopy. *Food Bioprocess Technol.* 10 (11), 2046–2059 <https://doi.org/10.1007/s11947-017-1975-3>.

Moscetti, R., Raponi, F., Ferri, S., Colantoni, A., Monarca, D., and Massantini, R. (2018a). Real-time monitoring of organic apple (var. Gala) during hot-air drying using near-infrared spectroscopy. *J. Food Eng.* 222, 139–150 <https://doi.org/10.1016/j.jfoodeng.2017.11.023>.

Moscetti, R., Sturm, B., Crichton, S.O., Amjad, W., and Massantini, R. (2018b). Postharvest monitoring of organic potato (cv. Anuschka) during hot-air drying using visible-NIR hyperspectral imaging. *J Sci Food Agric* 98 (7), 2507–2517 <https://doi.org/10.1002/jsfa.8737>. PubMed

Neri, L., Di Biase, L., Sacchetti, G., Di Mattia, C., Santarelli, V., Mastrocola, D., and Pittia, P. (2016). Use of vacuum impregnation for the production of high quality fresh-like apple products. *J. Food Eng* 179, 98.108.

Pomerantsev, A.L., and Rodionova, O.Y. (2012). Process analytical technology: A critical view of the chemometricians. *J. Chemometr.* 26 (6), 299–310 <https://doi.org/10.1002/cem.2445>.

Raponi, F., Moscetti, R., Monarca, D., Colantoni, A., and Massantini, R. (2017). Monitoring and optimization of the process of drying fruits and vegetables using computer vision: a review. *Sustainability* 9 (11), 1–27 <https://doi.org/10.3390/su9112009>.

Ratti, C. (2001). Hot air and freeze-drying of high-value foods: A review. *J. Food Eng.* 49 (4), 311–319 [https://doi.org/10.1016/S0260-8774\(00\)00228-4](https://doi.org/10.1016/S0260-8774(00)00228-4).

Shrestha, L., Kulig, B., Moscetti, R., Massantini, R., Pawelzik, E., Hensel, O., and Sturm, B. (2020). Optimisation of physical and chemical treatments to control browning development and enzymatic activity on fresh-cut apple slices. *Foods* 9 (1), E76 <https://doi.org/10.3390/foods9010076>. PubMed

Sturm, B., Hofacker, W.C., and Hensel, O. (2012). Optimizing the drying parameters for hot-air-dried apples. *Dry. Technol.* 30 (14), 1570–1582 <https://doi.org/10.1080/07373937.2012.698439>.

Sturm, B., Vega, N., and Hofacker, W. (2014). Influence of process control strategies on drying kinetics, colour and shrinkage of air dried apples. *Appl. Therm. Eng.* 62 (2), 455–460 <https://doi.org/10.1016/j.applthermaleng.2013.09.056>.

Sun, Q., Zhang, M., and Mujumdar, A.S. (2019). Recent developments of artificial intelligence in drying of fresh food: A review. *Crit Rev Food Sci Nutr* 59 (14), 2258–2275 <https://doi.org/10.1080/10408398.2018.1446900>. PubMed

Vega-Gálvez, A., Ah-Hen, K., Chacana, M., Vergara, J., Martínez-Monzó, J., García-Segovia, P., Lemus-Mondaca, R., and Di Scala, K. (2012). Effect of temperature and air velocity on drying kinetics, antioxidant capacity, total phenolic content, colour, texture and microstructure of apple (var. Granny Smith) slices. *Food Chem* 132 (1), 51–59

<https://doi.org/10.1016/j.foodchem.2011.10.029>. PubMed

Winiczenko, R., Górnicki, K., Kaleta, A., Martynenko, A., Janaszek-Mankowska, M., and Trajer, J. (2018). Multi-objective optimization of convective drying of apple cubes. *Comput. Electron. Agric.* 145, 341–348 <https://doi.org/10.1016/j.compag.2018.01.006>.